



OUTDOOR SPOT
FOR INSTALLATION ON GROUND OR WALL

The lamp has a body and flange that consists of a piece of stainless steel 316. The flange is brushed K320. The luminaire has an integrated LED module and a transparent tempered glass of 6 MM thick, mounted with special UV-glue. The luminaire is potted and IP68. The Evo luminaires are also equipped with stainless springs and fit well into an opening with a diameter of 41 to 45 MM.

evo

round / square

SPECIFICATIONS

EVO ROUND / SQUARE

HEIGHT	5,6 CM / 4,8 CM
WIDTH	5,6 CM / 4,8 CM
LIGHTSOURCE	LUXEON REBEL
COLOR TEMP.	2700 K
LUMEN OUTPUT	85 LM
OPTIC	25°
RATED VOLTAGE	24 V DC
DIMMABLE	YES
POWER	1.2 W
IP CLASS	IP68
INSULATION CLASS	III




INSTALLATION

The luminaire is equipped with 1 meter neoprene cable: 05RN-F 2 x 1 MM².

A separate 24 V DC power supply is required to operate the luminaire.

For installation into the ground, the Outer Casing Evo is available. Note that an efficient drainage of water with a layer of gravel should be foreseen.

→ pg 90 OUTER CASING EVO

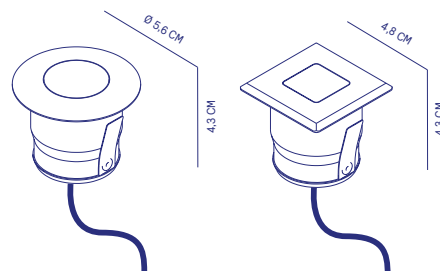

ORDER N°.

ROUND

SQUARE

EVO

1510

1520

EVO ROUND

EVO SQUARE