



DESIGN GARDEN LUMINAIRE

A beautifully designed armature consisting of a stainless steel 316 tube, brushed K320. The luminaire has an integrated LED module covered with transparent tempered glass. A solid stainless steel reflector is placed on top of the fixture. The mounting plate is made of solid-turned POM plastic.

torch

40 / 65 / XL 85



SPECIFICATIONS	TORCH 40 / 65 / XL 85
HEIGHT	40 / 60 / 85 CM
DIAMETER	Ø 50 MM / 50 MM / 80 MM
LIGHTSOURCE	LUXEON REBEL / LUXEON COB
COLOR TEMP.	2700 K
LUMEN OUTPUT	160 LM / 160 LM / 700 LM
RATED VOLTAGE	230 V / 50-60HZ
POWER	3 / 3 / 8 W
IP CLASS	IP65
INSULATION CLASS	I


INSTALLATION

The luminaire is equipped with 1 meter neoprene cable: H05RN-F 3 x 0,75 MM².
The fitting can be installed into the soil with a dedicated spike (to be ordered separately).

Versions:

- **B** reflects the light around
- **C** reflects the light around and upwards
- pg 90 GROUND SPIKE 9010 (Torch 40 + 65)
- pg 90 GROUND SPIKE 9013 (Torch XL 85)

ORDER NØ.	B 	C 
TORCH 40	0811	0831
TORCH 65	0821	0841
TORCH XL 85	0921	0941

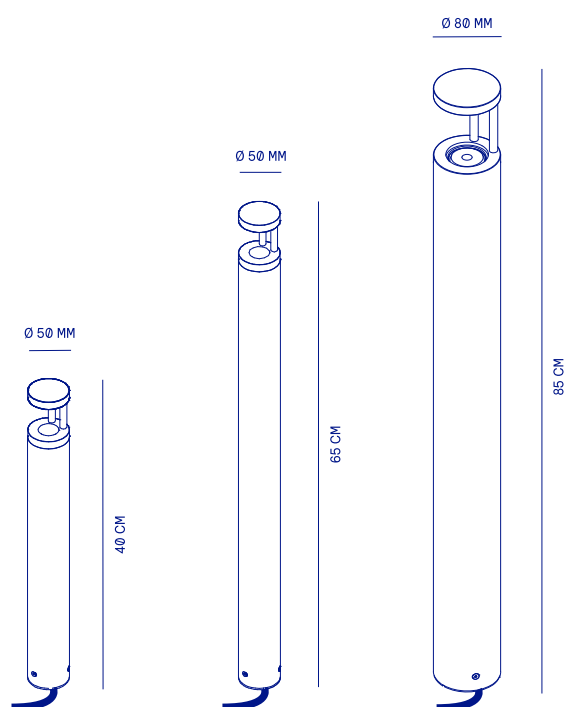

TORCH 40

TORCH 65

TORCH XL 85