


tower

The Tower is a versatile spot for accentuating garden elements, trees and plants. The tower is available with three different beam angles and three colours, black powder coated or natural anodized. For an optimal installation this projector is available in 24V and 230V.


SPECIFICATIONS	TOWER	
LIGHTSOURCE	LUXEON M	
COLOR TEMP.	2700 К	
LUMEN OUTPUT	800 LM	
OPTICS	8° / 27° / 40°	
RATED VOLTAGE	24V DC OR 230V AC	
DIMMABLE	24V YES, 230V ON REQUEST	/
POWER	10 W	
IP CLASS	IP65	
INSULATION CLASS	24V: III , 230V: I	
CABLE	1 M (NEOPRENE)	

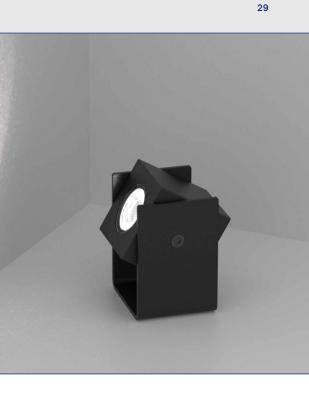

INSTALLATION

Install this product exclusively in combination with the recommended power supplies, connection materials (DX power supply or power supply kit, DX Cable, DX connector & resin), and 24V fixtures from Dexter Lighting.

ARTICLE NØ.		BLACK	CORTEN
TOWER 8°	24V	1470	1471
	230V	1456	1450
TOWER 27°	24V	1473	1474
	230V	1457	1451
TOWER 40°	24V	1476	1477
	230V	1458	1452
GROUND SPIKE TOWER		9014	



TOWER